


# STENNER

# STENNER

## ST80 Specifications

Pulley diameter	850mm (33.5")
Bandsaw thickness	Max 1.0mm (19g) Min 0.8mm (21g)
Bandsaw blade width	80mm (3.25")
Depth of cut	310mm (12.25")
Max opening saw to fence	305mm (12")
Max opening saw to feed rollers	230mm (9")
Feeds speeds (infinitely variable)	5 - 35 metres/min (16 - 110ft/min)
Main motor	11kw (15hp)
Height of table from floor	900mm (35.5")
Cleaner fluid capacity	3 litres (0.66 gallon)
Pneumatic requirements	0.2 litres/sec (0.42cfm) @ 6 bar
Dust extraction outlet	1 x 150mm + 1 x 100mm (1 x 6" + 1 x 4")
Machine length	1725mm (5' 9")
Machine width	840mm (2' 9")
Machine height	2115mm (6' 11")
Machine weight	1500kgs (1.5 ton)

- Options: 1 Rubber covered feed roller  
2 Arris rail feed roller

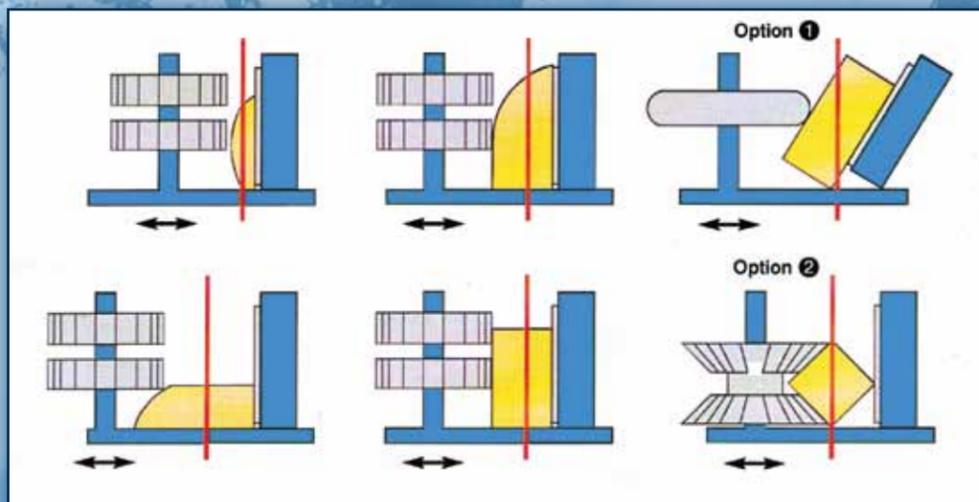


Compact Design  
Real Performance

Stenner Ltd

Blundells Road, Tiverton, Devon, EX16 4JX United Kingdom  
Tel: + 44 (0) 1884 255700 Fax: + 44 (0) 1884 257794  
Email: sales@stenner.co.uk Website: www.stenner.co.uk

## ST80 Radial Arm Resaw

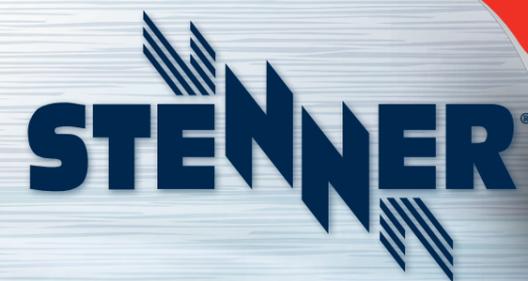

The ST80 is the latest addition to Stenner's famous range of radial arm resaws, designed as a machine of classical strength and durability which would be equally at home in a small joinery shop or a busy service mill.

This resaw continues the Stenner tradition of constructing a compact, well engineered machine and combining it with the latest technology in a package that has both reliability and a very high performance capability.

The ST80 is a true resaw but requires no special installation. The machine needs only to be bolted to the factory floor and connected to mains electricity, compressed air and dust extraction.

Capable of handling sections of over 500mm width and a maximum depth of cut of 310mm, the ST80 has pneumatic saw straining which, coupled with factory set replaceable pressure saw guides, ensure accuracy of cut and minimum blade deviation. These features are combined with a 11kw (15hp)

main motor and a feed system controlled by an electronic variable speed device offering an operating range from 5 to 35 metres / min.

The multi-roller fence tilts to 35 degrees for angle cutting and offers 305mm (12 in) saw to fence capacity at 90 degrees.



The company has a policy of continuous product development and improvement, specifications are therefore subject to change without notice. The company accepts no liability for discrepancies in specifications or illustrations contained in its publications.



# ST80 Radial Arm Resaw